

2.1MEGAPIXEL HD-SDI 60FPS BROADCAST MINI BULLET CAMERA

HDC-B19BS

• ACCESSORY (Option)



Ear Headset Mount Kit (WA-001)



Bullet Cam Mount Kit (WA-002)




Bike Mount Kit (WA-003)



→ KEY FEATURES

- 1/3" 2.1Megapixel PANASONIC CMOS Image Sensor
- Full HD 1920x1080 (25p, 30p, 50p, 60p, 50i, 60i)
- HD 1280x720 (25p, 30p, 50p, 60p)
- HD-SDI, 3G-SDI & Analog CVBS Video Out
- Megapixel Fixed Lens f=3.6mm
- DNR (Digital Noise Reduction)
- WDR (Wide Dynamic Range) : 1080p/30fps
- Min. Illumination of 0.01Lux
- Sens-up
- Auto White Balance
- Defog
- LSC (Lens Shading Compensation)
- ACE (Adaptive Contrast Enhancer)
- DIS (Digital Image Stabilizer)
- Motion Detection & Privacy Mask
- Digital Zoom
- Enable Reverse Display by Mirror & Flip
- Max. Transmission : 100m (5C-HFBI Cable Use)
- OSD Control


→ CABLE

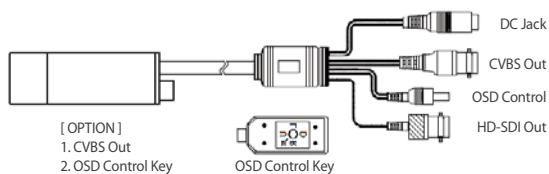

1. DC Jack + HD-SDI Out
2. DC Jack + HD-SDI Out + CVBS Out
3. DC Jack + HD-SDI Out + OSD Control Key
4. DC Jack + HD-SDI Out + CVBS Out + OSD Control Key

→ DIMENSIONS

Unit : mm

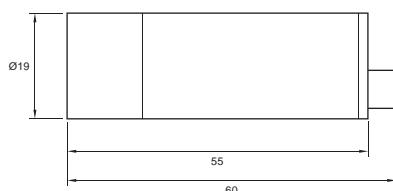

→ SPECIFICATIONS

HDC-B19BS	
Image Sensor	1/3" 2.1Megapixel PANASONIC CMOS Sensor
Total Pixels	2010(H) x 1108(V) / 2,227,080 (pixels)
Effective Pixels	1944(H) x 1092(V) / 2,122,848 (pixels)
Scanning System	Progressive
Sync System	Internal
Resolution	More than 1000TVL
Video Output	HD-SDI / 3G-SDI 1920x1080 (25p, 30p, 50p, 60p, 50i, 60i) 1280x720 (25p, 30p, 50p, 60p) Composite (1.0Vp-p, 75Ω) Color Bar Signal
S/N Ratio	More than 50dB (AGC Off)
Min. Illumination	0.1Lux (F1.2, 50IRE, AGC Max.) / DSS x4 : 0.01Lux
Lens	Megapixel Fixed Lens, 1/2.5" 3.6mm, M12 (Option : 6.0mm)
Electronic Shutter Speed	Manual (1/30(25) ~ 1/30,000sec.)
Sens-up	x2 ~ x32
White Balance	Auto / AutoEXT / Preset / Manual (R-Gain, B-Gain)
Back Light	Off / HLC / BLC / WDR
WDR	Off / Low / Middle / High
Day & Night	Auto / Color / B&W
DNR	Off / Low / Middle / High
LSC	Off / On
Defog	Off / On
Digital Zoom	x1 ~ x16
Privacy Mask	Yes
Motion Detection	Yes
Mirror / Flip	Off / On
Camera ID	Yes
Serial Port	No
ICR (Filter Change)	No
Operating Temperature	-10°C ~ 50°C
Storage Temperature	-20°C ~ 70°C
Operating Humidity	Under 90% Non-condensing
Power Source	DC 12V 1.0A
Power Consumption	150mA, 1.8W
Dimension	19(W) x 19(H) x 60(D)mm
Weight	22g (W/O Cable)

• Design and specification are subject to change without notice.