

WKC-2000

PTZ Controller



- USB mouse function
 - Operate with 9V battery
 - Controls from 1 ~ 255 cameras.
 - Multiple protocol supported in each channel
 - RS-485 / RS-422 communication (Tx : 3 port, Trx :1 port).
 - Programmable user preferences
 - Built-in 3-Axis proportional joystick
- Easy upload programmed data via serial communication.
 - Built-in 2 lines character LCD.
 - User password support.
 - programmable transmission speed for each ID.
 - Easy to be integrated with DVR



SPECIFICATIONS


MODEL	WKC-2000
Keyboard Communication	Interface : RS-485 / RS-422
	Operating distance : 4000ft (1.2Km) on 24 AWG wire
	Protocol : Multiple (Pelco-D, Pelco-P, Etc.)(Baud rate selectable)
Connector Type Data	TERMINAL BLOCK(8p)
Keyboard Button	Rubber button
	Numeric keypad and camera function key
Joystick	Stick 3-axis, variable speed with zoom
Input Voltage	DC 12V or 9V battery (Battery mode)
Power Consumption	Max. 140mA
LCD Display	Graphic display 16 character x2 lines
Operating Temperature	0°C ~ 45°C
Humidity	10% ~70% Non-condensing
Dimension	280(W) x 179.53(L) x 100.08(H) mm
Weight	0.7 kg (WKC-1200 KEYBOARD, ADAPTOR)
Packing Include	Packing include : USB CABLE, MANUAL, TERMINAL BLOCK(8p)



Mouse Function



RS-485 / RS-422 Communications

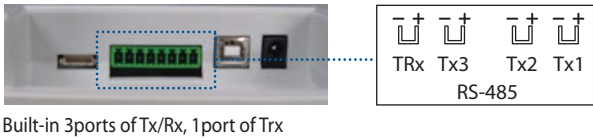

9V Battery



DIMENSIONS | Unit : mm

