

24 PORT GIGABIT POE SWITCH

SFC4000HP




→ KEY FEATURES

- UTP 24 Port & SFP 4 Slot L2 Management Switch Hub
- Auto MDI/MDI-X Auto Sensing
- Web Based Management, SNMP Management
- IGMP Snooping Support
- IEEE 802.1p Qos & Voip Qos Support
- IEEE 802.3at PoE 30.8W 24 Port Support (Max. 360W)
- Support Port Mirroring for Traffic Analysis and Network Error

→ DIMENSIONS

Unit : mm

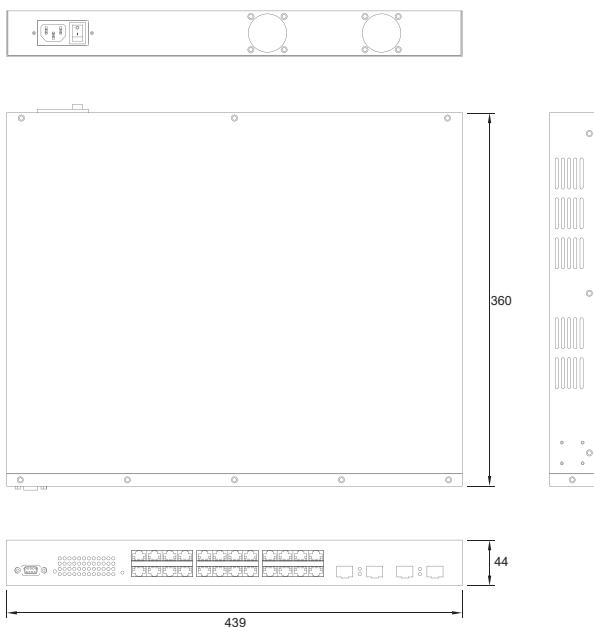

→ SPECIFICATIONS

| SFC4000HP | | |
|------------------------------|----------------|--|
| Interface | Link Port | 10/100/1000 Base-T RJ-45 24port PoE, SFP Slot combo port (Port 21~24), Auto Negotiation, MDI-X |
| | Network Cable | CAT.5e over |
| | LED | System : Power, Master, Fan alert, PoE Power alert Ports : 10/100/1000 Link/Act, PoE In-use, SFP Link, Stack port link |
| PoE & Network | Output | IEEE 802.3af Standard (15.4W, 350mA) IEEE 802.3at Standard (30.8W, 590mA) (Max. 369.6W) |
| | Data Bandwidth | 10/100/1000Mbps Full Duplex |
| | Distance | 100m@CAT.5e |
| Lightning Protection Circuit | | Built-in |
| Power In | | AC 100~240V, 50/60Hz |
| Operating Temperature | | 0°C ~ 60°C |
| Storage Temperature | | -20°C ~ 80°C |
| Humidity | | 5% ~ 95% (W/O Condensation) |
| Material | | Aluminum |
| Dimension | | 439(W) x 44(H) x 360(D)mm |
| Weight | | 4.5kg |

* Design and specification are subject to change without notice.