

2MEGAPIXEL FULL HD NETWORK BOX CAMERA


WIBT-V200D



→ KEY FEATURES


- 1/2.8" 2Megapixel SONY CMOS Image Sensor
- 1080P@30fps High Resolution
- Megapixel C/CS Mount Lens
- 2D+3D DNR (Digital Noise Reduction)
- WDR (Wide Dynamic Range)
- Defog
- Smart IR
- H.264 & MJPEG Dual Stream
- CBR & CVBR Modes
- ONVIF (Profile S)
- PoE : IEEE 802.3af
- Micro SD/SDHC Memory Slot

→ REAR

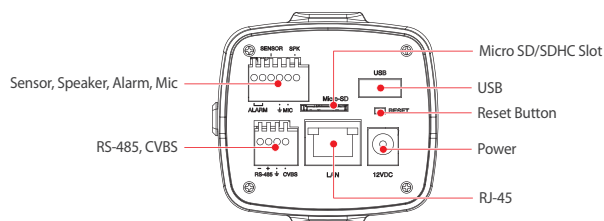

→ DIMENSIONS

Unit: mm

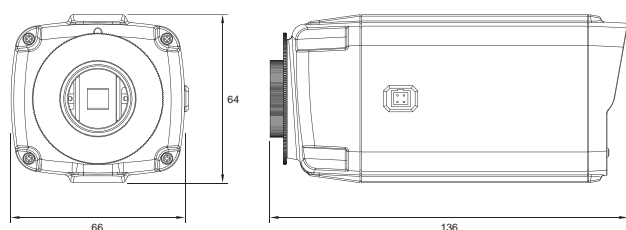

→ SPECIFICATIONS

WIBT-V200D		
Camera	Image Sensor	1/2.8" 2Megapixel SONY CMOS Image Sensor
	Total Pixels	1952(H) x 1116(V) = 2.18M (Pixels)
	Effective Pixels	1944(H) x 1104(V) = 2.15M (Pixels)
	Scanning System	Progressive Scan
	S/N Ratio	More than 50dB
	Min. Illumination	0.1Lux
	Lens	Megapixel C/CS Mount Lens
	Electronic Shutter	1/30 ~ 1/50,000sec.
	Image Setting	Day & Night (Auto, Color, B/W) / WDR / 2D+3D DNR / Defog / Privacy Mask Effect - Color / Sharpness / Mirror & V-Flip / etc.
Video	Compress Format	H.264 High Profile / MJPEG
	Resolution	Up to 1920x1080
	Frame Rate	H.264 Up to 30fps with 1920x1080 MJPEG Up to 30fps with VGA Resolution
	Bit Rate Control	100,000 ~ 8,000,000 bits/s
	Streaming	CVBR, CBR
Network	Protocol	HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP
	ONVIF	Ver. 2.2 (Profile S)
	Security	Password Protection, User Access Log, HTTPS Encryption
	Intelligent Video	Motion Detection up to 1920x1080 with 12x12 Blocks
	Alarm Events	File Upload via FTP and E-mail / Notification via E-mail, FTP and TCP
	Remote Application	Web Viewer, Mobile Viewer, CMS, IP Installer
	Firmware Upgrade	Remote Upgrade via Network
	Simultaneous Access	8
	API	CGI Interface Document, ActiveX Interface (OCX(dll)+Document)
	Ethernet	RJ-45 (10/100 Base-T)
	Video Output	CVBS : 1.0Vp-p/75Ω
	Audio In/Out	In : 1 / Out : 1
	Alarm In/Out	In : 1 / Out : 1
	Reset Button	1ea (Factory Default)
Interface	Status LED	Power, Network
	Memory Slot	Micro SD/SDHC
	WAN USB	USB Wifi
	Power Source	DC 12V / 1.5A, PoE (IEEE 802.3af)
	Power Consumption	Max. 4W
	Operating Temperature	-10°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C
	Operating Humidity	10% ~ 90%
	Storage Humidity	10% ~ 90%
	Dimension	110(Ø) x 47.5(H)mm
General	Weight	350g

• Design and specification are subject to change without notice.