

## NIGHT COLOR VIDEO 2MEGAPIXEL HD NETWORK HOUSING CAMERA

## IG-H200 (MI)



## → KEY FEATURES

- 2.1Megapixel DARK IGUANA Sensor
- Ultra Low Light Color Camera (0.0000001Lux)
- Megapixel Motorized Lens f=2.8~12.0mm
- True Day & Night
- 3D DNR (Digital Noise Reduction)
- D-WDR (Digital Wide Dynamic Range)
- Up to 30fps in All Resolutions
- Triple Codec (H.264 / MPEG4 / MJPEG)
- Triple Stream
- ONVIF Support
- Zoom & Focus can be Controlled Remotely
- View Available Smartphones
- Up to 10 Users Simultaneously Access
- PoE Support

## → LOW-LIGHT VIDEO




[ General Camera ]



[ Dark Igwana Camera ]

## → DIMENSIONS

Unit : mm

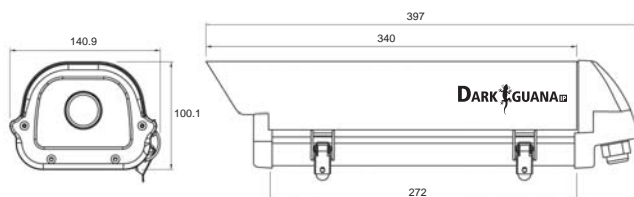

## → SPECIFICATIONS

## IG-H200 (MI)

Camera	Image Sensor	2.1Megapixel DARK IGUANA Sensor
	Total Pixels	1945(H) x 1109(V) = 2.16M (Pixels)
	Effective Pixels	1945(H) x 1097(V) = 2.13M (Pixels)
	Scanning System	Progressive Scan
	Lens	Megapixel Motorized Lens f=2.8~12.0mm
	Electronic Shutter	Auto (1/15 ~ 1/15,000sec.) / Suppress Rolling / Manual
	White Balance	Auto / Indoor / Outdoor / Fluorescent
	BLC	D-WDR / HLC
	Day & Night	Auto / Day (Color) / Night (BW)
	3D DNR	1 ~ 100
	LDC	Support
	Defog	Support
	Privacy	On / Off (4 Programmable Zone)
Network	Motion Detection	On / Off (48 Zone, 1 ~ 5)
	Operation System	Embedded Linux
	Interface	RJ45 10/100 Base-T PoE
	Protocol	TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP, HTTP, DHCP, FTP, SMTP, DNS, DDNS
	ONVIF	Ver. 2.4
	DDNS	iplinker.net
Video	Simultaneous Access	Max. 10 User
	Compress Format	H.264 / MPEG4 / MJPEG
	Resolution	1920x1080 / 1280x1024 / 1280x960 / 1280x720 / 640x480 / 320x240
	Frame Rate	5fps ~ 30fps @ All Resolution
	Video Quality	H.264, MPEG4 : Bit Rate Control MJPEG : Quality Level Control
Streaming	Streaming	Triple Stream (Stream 1, 2, 3) RTP/RTSP, Unicast RTP, Multicast RTP
	Audio	Compress Format : G.711 $\mu$ -law Streaming : Two Way
Event	Sensor In	1 (Digital Input)
	Alarm Out	1 (Digital Output, Open Collector)
Web-Browser	Manager	Internet Explorer, Firefox, Safari, Opera
	Viewer	Internet Explorer only (Active-X)
General	Operating Temperature	-10°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C
	Operating Humidity	0% ~ 80%
	Power Source	DC 12V ( $\pm 10\%$ ) / PoE
	Power Consumption	Max. 195mA
	Dimension	140.9(W) x 100.1(H) x 340(D)mm
	Weight	Appx. 1.5kg

\* Design and specification are subject to change without notice.